

Atmosphere – Surface Interaction

F. Cheruy

Technical note : Description of the interface with the surface and the computation of the turbulent diffusion in LMDZ (J.L.Dufresne)

http://www.lmd.jussieu.fr/~jldufres/publi/pbl_surface.pdf


Thèse F. Hourdin 1993 (section 3.3.3 and annexes)

Wang F., F. Cheruy, J.L. Dufresne, 2016: The improvement of soil thermodynamics and its effects on land surface meteorology in the IPSL climate model. *Geosci. Model Dev.*, 9, 363–381, 2016 www.geosci-model-dev.net/9/363/2016/

Atmosphere-surface interactions

The **atmosphere and the surface are coupled** through *turbulence* (in boundary layer) and *radiation* (SW and LW). Currently, there is no direct influence of the surface to other parametrizations.

The surface “receive” precipitation from the atmosphere (no direct feedback).

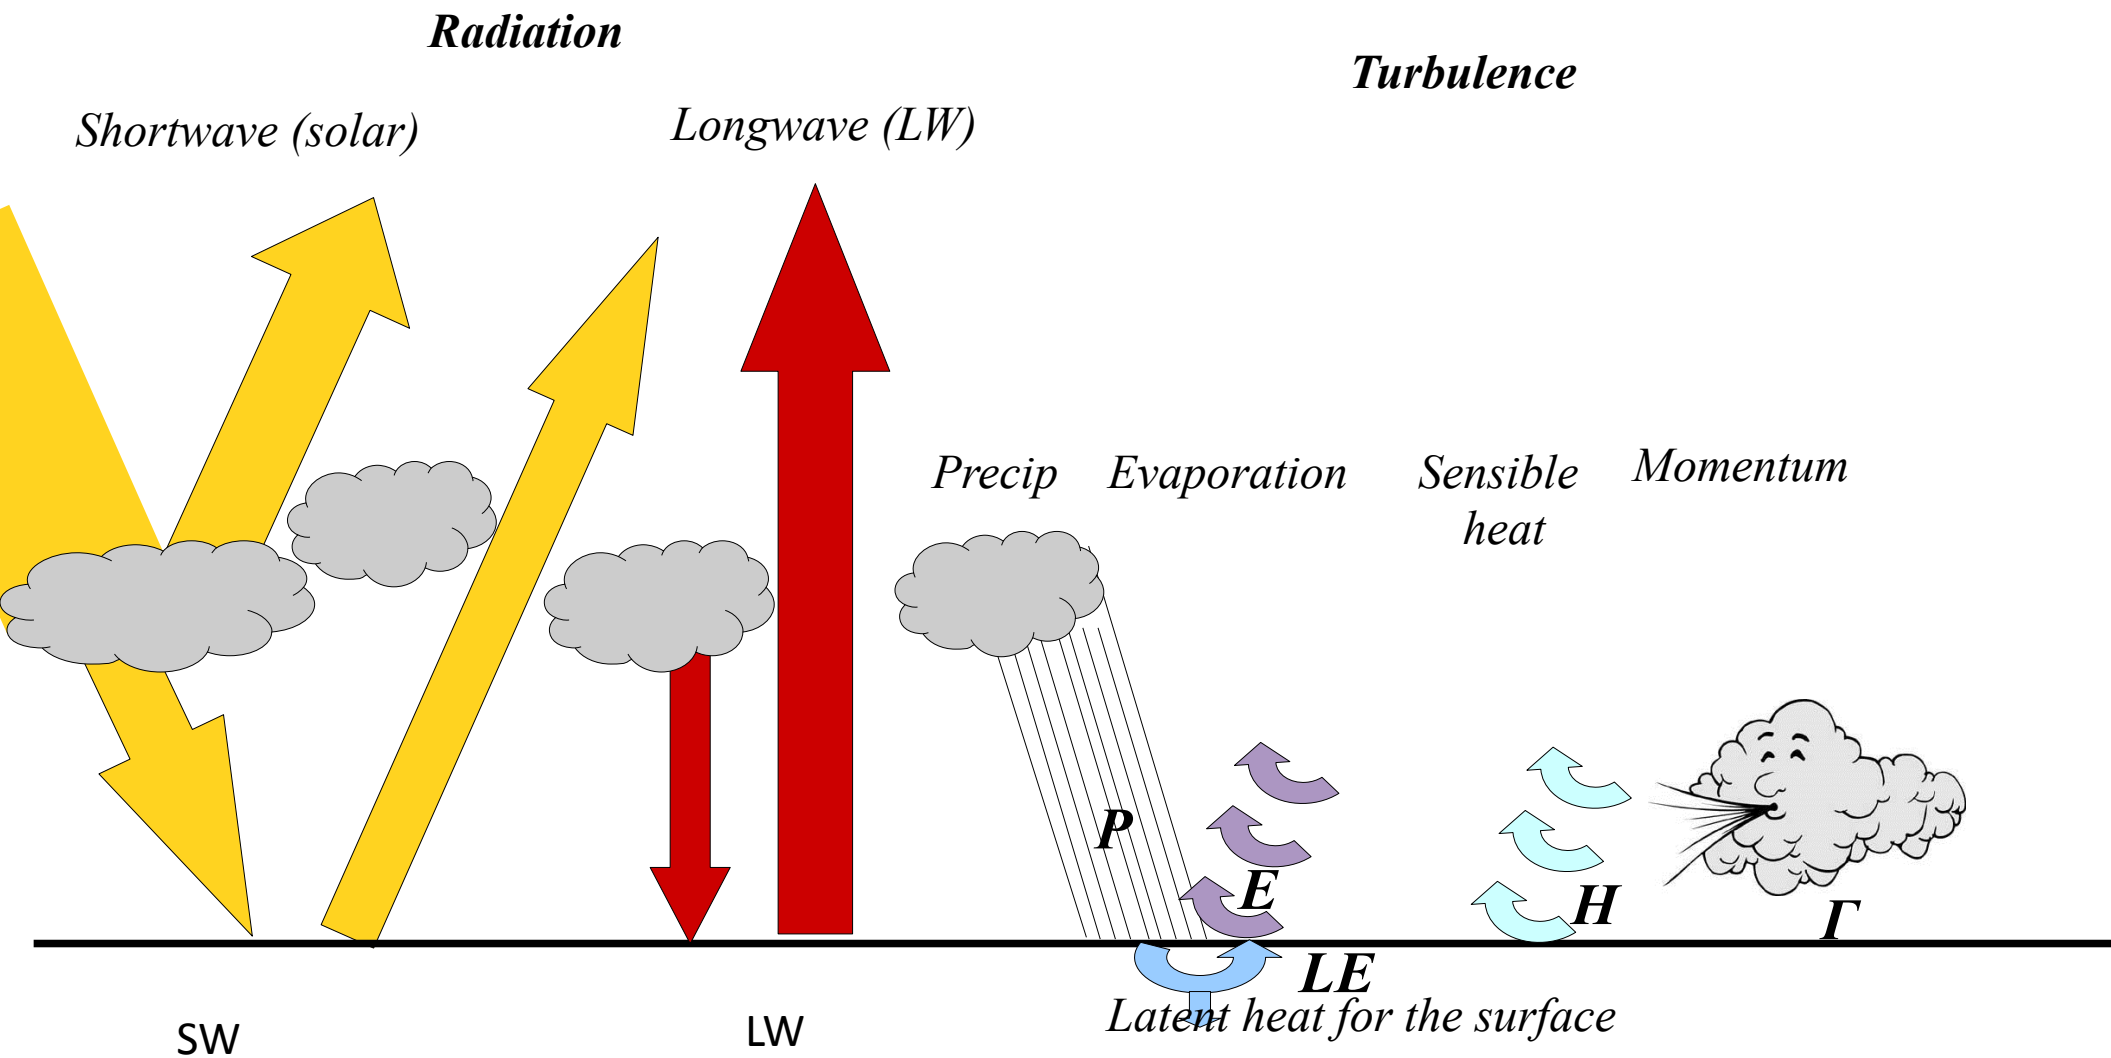

Atmosphere-surface interactions

The **atmosphere and the surface are coupled** through *turbulence* (in the boundary layer) and *radiation* (SW and LW). Currently, there are no direct influence of the surface to other parametrizations.

The surface “receive” precipitation from the atmosphere (no direct feedback).


The surface impacts the atmosphere via the orography (factors constant with time), roughness, albedo emissivity

In LMDZ:

Each surface grid may be decomposed in a maximum of 4 sub-grids of different types: land (_ter), continental ice (_lic), open ocean (_oce), sea-ice (_sic)

Radiation depends only on mean surface properties

Turbulent diffusion depends on local sub-grid property

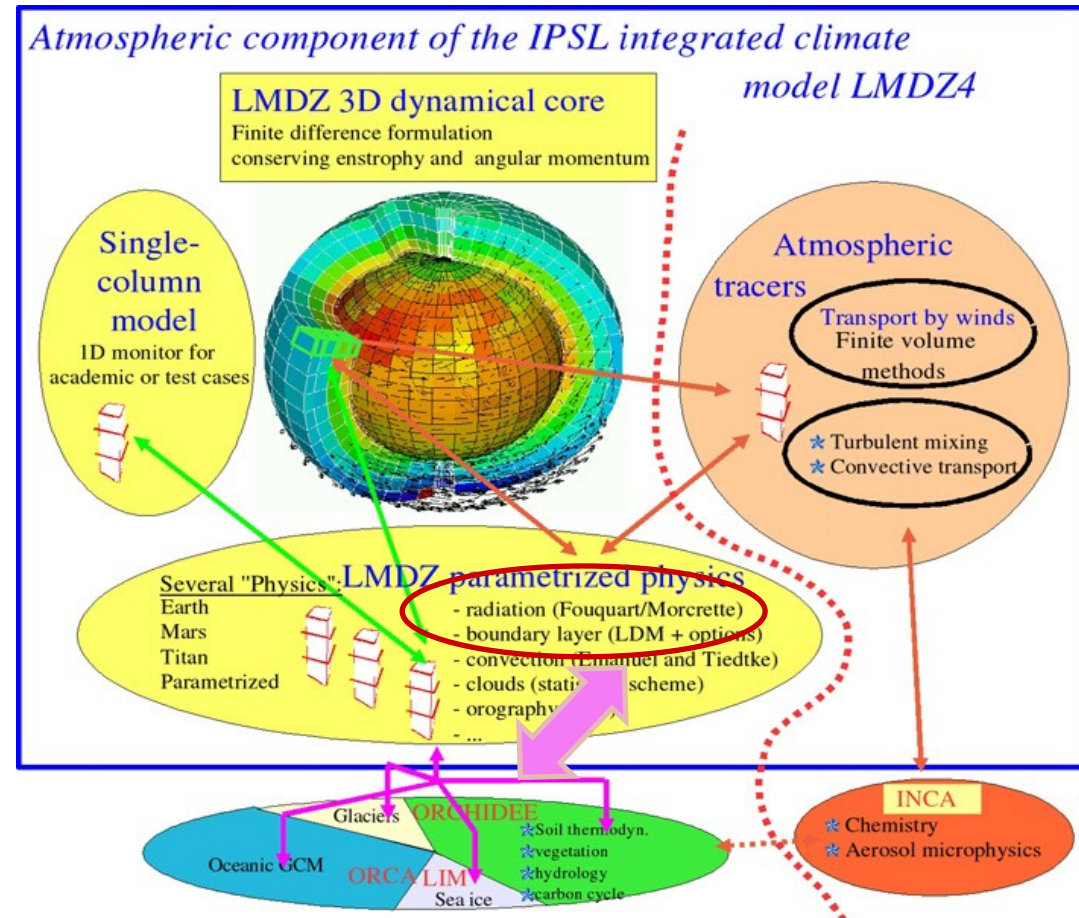

Turbulent diffusion (pbl_surface)

- Change of a variable X with the time due to the turbulent transport (continuity) :


$$\frac{\partial X}{\partial t} = -\frac{1}{\rho} \frac{\partial \Phi}{\partial z} = -\frac{\partial \Phi}{m_l} \quad \begin{array}{l} m_l = \text{mass per surface unit (kg/m}^2\text{)} \\ X = \text{specific humidity, momentum,} \\ \text{moist static energy, tracers} \end{array}$$

$$\Phi = -\rho k_z \frac{\partial X}{\partial z} \quad \begin{array}{l} k_z \text{ Diffusion coefficient (m}^2\text{s}^{-1}\text{)} \\ \Phi: \text{Upward positive} \end{array}$$

- Vertical discretization

$$\Phi^l = -K_l (X_l - X_{l-1})$$

$$\delta P = (P_{l-1} - P_l) = \rho g \delta z = m_l g \quad K_l = \frac{k_z \rho^2 g}{P_{l-1} - P_l}$$

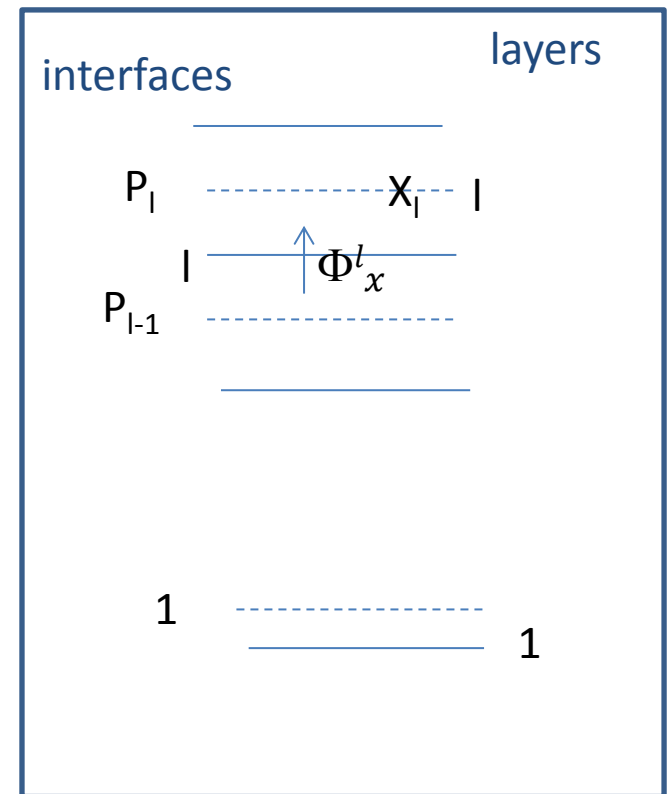

$$\Phi_x^l = -K_l (X_l - X_{l-1})$$


$$m_l \frac{X_l(t + \delta t) - X_l(t)}{\delta t} = \phi_l(t + \delta t) - \phi_{l+1}(t + \delta t)$$

$$m_l \frac{X_l - X_l^0}{\delta t} = \phi_l - \phi_{l+1} \quad \text{with} \quad \begin{array}{l} X_l = X_l(t + \delta t) \\ X_l^0 = X_l(t) \end{array}$$

$$m_l \frac{X_l - X_l^0}{\delta t} = K_{l+1}(X_{l+1} - X_l) - K_l(X_l - X_{l-1})$$

$$\left(\frac{m_l}{\delta t} + K_{l+1} + K_l \right) X_l = \frac{m_l}{\delta t} X_l^0 + K_{l+1} X_{l+1} + K_l X_{l-1}$$

$$-K_l X_{l-1} + \left(\frac{m_l}{\delta t} + K_{l+1} + K_l \right) X_l + K_{l+1} X_{l+1} = \frac{m_l}{\delta t} X_l^0$$

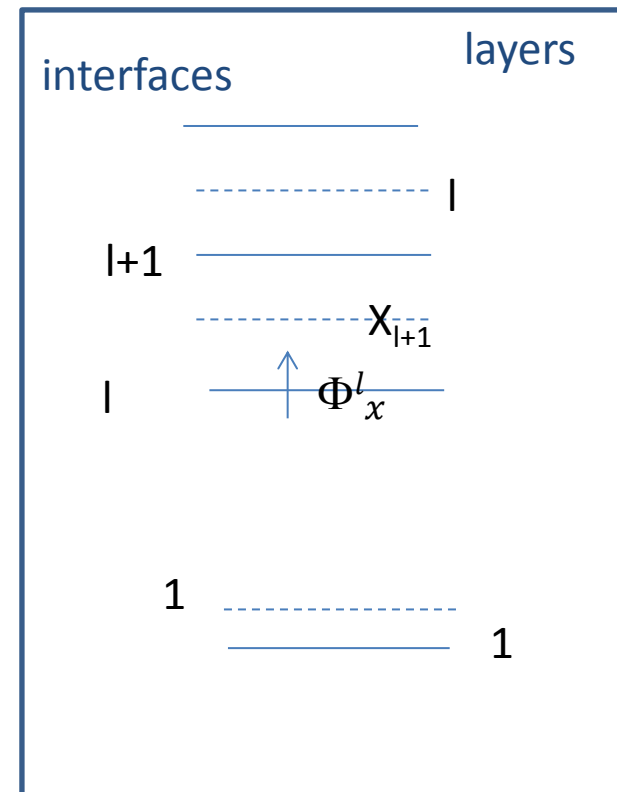

Tridiagonal system that can be solved for the vector X

Solving the tridiagonal system

$$\left(\frac{m_l}{\delta t} + K_{l+1} + K_l \right) X_l = \frac{m_l}{\delta t} X_l^0 + K_{l+1} X_{l+1} + K_l X_{l-1}$$

which may be written as:

$$\boxed{(\delta P_l + R_{l+1}^X + R_l^X) X_l = \delta P_l X_l^0 + R_{l+1}^X X_{l+1} + R_l^X X_{l-1}} \quad \underline{(2 \leq l < n)}$$

$$\text{with } R_l^X = g\delta t K_l$$

At the top ($l=n, \Phi_n=0$)

$$\boxed{(\delta P_n + R_n^X) X_n = \delta P_n X_n^0 + R_n^X X_{n-1}}$$

At the bottom: ($l=1$): $m_1 \frac{X_1 - X_1^0}{\delta t} = \Phi_x^1 - \Phi_x^2$

$$m_1 \frac{X_1 - X_1^0}{\delta t} = K_2(X_2 - X_1) - F_1^X$$

$$\boxed{(\delta P_1 + R_1^X) X_1 = \delta P_1 X_1^0 + R_2^X X_2 - g\delta t \underline{F_1^X}}$$

With F_1^X : flux of X at the bottom of the first layer (i.e. between the surface and the atmosphere), positive downward.

$$K_l = \frac{k_z \rho^2 g}{P_{l-1} - P_l}$$

Solving the tridiagonal system

Starting from top:

$$(\delta P_n + R_n^X) X_n = \delta P_n X_n^0 + R_n^X X_{n-1}$$

can be written as:

$$X_n = C_n^X + D_n^X X_{n-1}$$


with

$$C_n^X = \frac{X_n^0 \delta P_n}{\delta P_n + R_n^X}$$

$$D_n^X = \frac{R_n^X}{\delta P_n + R_n^X}$$

with $R_i^X = g\delta t K_i$

Solving the tridiagonal system

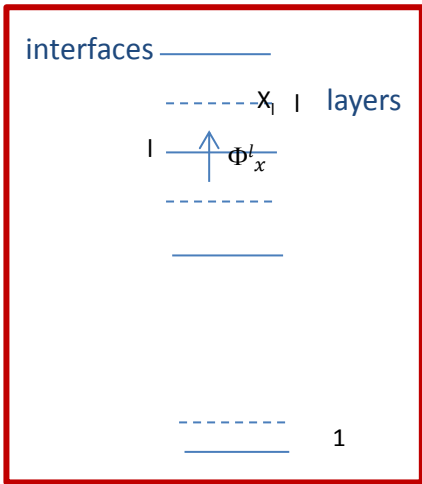

$$X_{l+1} = C_{l+1}^X + D_{l+1}^X X_l$$

$$(\delta P_l + R_{l+1}^X + R_l^X) X_l = \delta P_l X_l^0 + R_{l+1}^X X_{l+1} + R_l^X X_{l-1} \quad (2 \leq l < n)$$

$$(\delta P_l + R_{l+1}^X (1 - D_{l+1}^X) + R_l^X) X_l = \delta P_l X_l^0 + R_{l+1}^X C_{l+1}^X + R_l^X X_{l-1}$$

with $R_l^X = g\delta t K_l$

So we obtain by recurrence:

$$X_l = C_l^X + D_l^X X_{l-1} \quad (2 \leq l \leq n)$$

with, for $(2 \leq l < n)$

depend only on properties in the layers above and the variables at the previous time step.

$$\left\{ \begin{aligned} C_l^X &= \frac{X_l^0 \delta P_l + R_{l+1}^X C_{l+1}^X}{\delta P_l + R_l^X + R_{l+1}^X (1 - D_{l+1}^X)} \\ D_l^X &= \frac{R_l^X}{\delta P_l + R_l^X + R_{l+1}^X (1 - D_{l+1}^X)} \end{aligned} \right.$$

Solving the tridiagonal system

At the bottom of the boundary layer $X_2 = C_2^X + D_2^X X_1$

$$(\delta P_1 + R_2^X) X_1 = \delta P_1 X_1^0 + R_2^X X_2 - g\delta t F_1^X$$

replacing X_2 in the equation above:


$$X_1 = A_1^X + B_1^X \cdot F_1^X \cdot \delta t$$

with

$$A_1^X = \frac{X_1^0 \delta P_1 + R_2^X C_2^X}{\delta P_1 + R_2^X (1 - D_2^X)}$$

$$B_1^X = \frac{-g}{\delta P_1 + R_2^X (1 - D_2^X)}$$

Solving the tridiagonal system

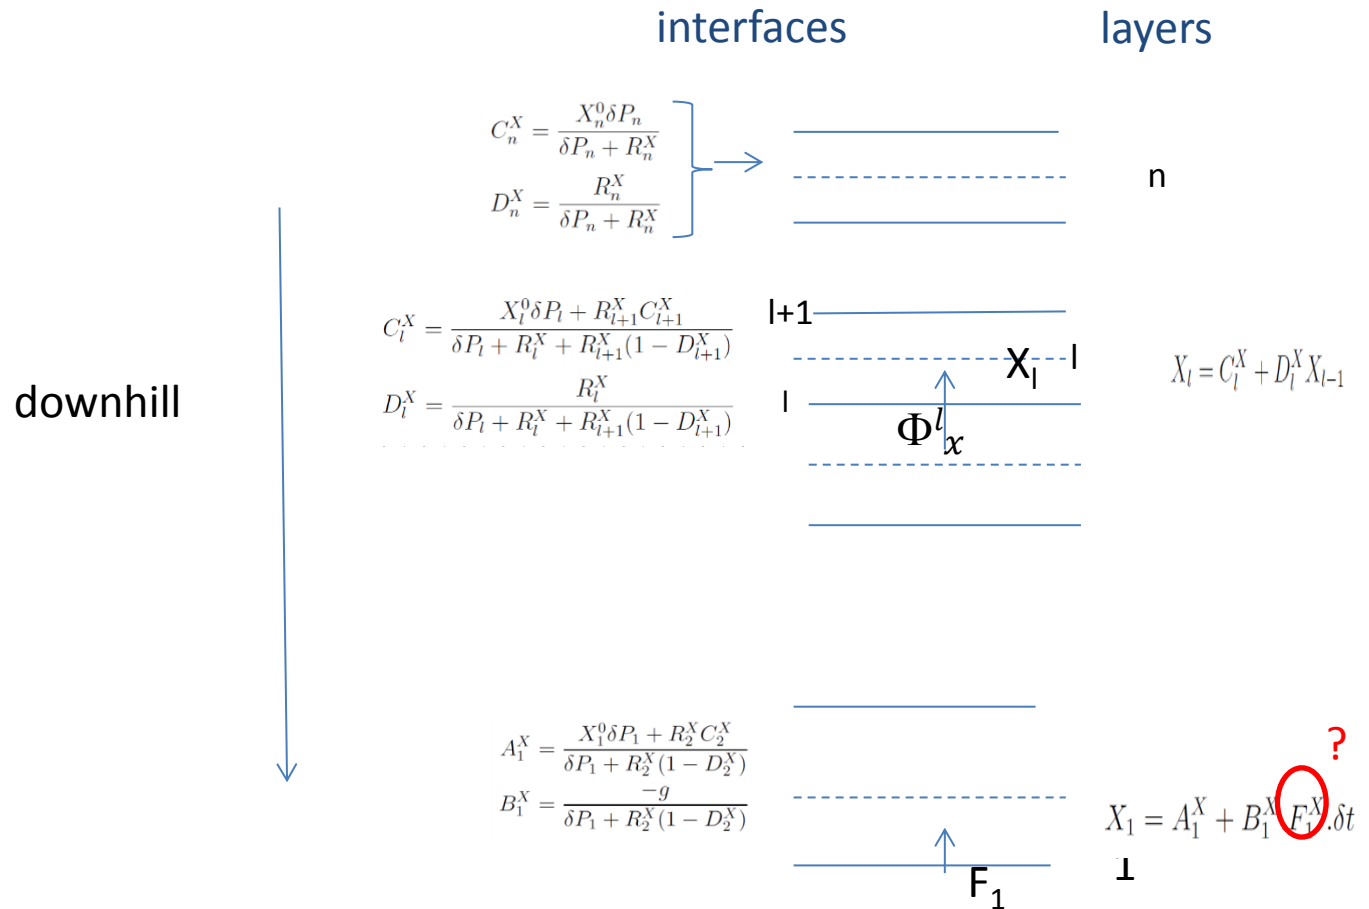

X = wind, enthalpie, specific humidity, tracers

F_1^X (flux of water mass, flux of heat, flux of momentum) is either prescribed or computed for each sub-surface

Once F_1^X is known, the X_i can be computed from the first layer to the top of the PBL

Coupling with the surface : Compute F_x^1

Depends on the vertical diffusion scheme

$$F_x^1 = \text{Bulk formula} = \rho C_d^x |V| (X_1 - X_s) = \frac{X_1 - A_1}{B_1 \delta t}$$

C_d^x drag coefficient (Monin Obukhov, constant flux in the surface layer)
depends on

- roughness lengths (gustiness, vegetation),
- Richardson number (boundary layer stability)
- Formulation depends on the sub-surface type

routine cdrag.F90

Once X_s is known, X_1 and F_x^1 are known

Coupling with the surface : compute T_s and F_1^T (sensible heat flux)

Case of the continental surface and the temperature

- Heat conduction in the soil: Diffusion equation :

$$\left\{ \begin{array}{l} \Phi_T = -\lambda \frac{\partial T}{\partial z} \\ \frac{\partial T}{\partial t} = -\frac{1}{c} \frac{\partial \Phi_T}{\partial z} \end{array} \right. \quad \begin{array}{l} \lambda = \text{thermal diffusivity} \\ C = \text{thermal capacity} \end{array}$$

Boundary conditions:

- ✓ bottom : $\Phi = 0$
- ✓ top: Continuity of the fluxes and the temperature between sub-surface and atmosphere

$$SW_{\text{net}} + LW_d - \underbrace{\varepsilon \sigma T_s^4 + H + L + \Phi_0}_{\text{depend on } T_s} = 0$$

$$H = \beta V C_d (q_s(T_s) - q_1)$$

$$L = -\rho C_p V C_d (T_1 - T_s)$$

Coupling with the surface : compute T_s and F_1^T (sensible heat flux)

Case of the continental surface and the temperature

- Heat conduction in the soil: Diffusion equation :

$$(C) \begin{cases} \Phi_T = -\lambda \frac{\partial T}{\partial z} \\ \frac{\partial T}{\partial t} = -\frac{1}{C} \frac{\partial \Phi_T}{\partial z} \end{cases} \quad \begin{array}{l} \lambda = \text{thermal diffusivity} \\ C = \text{thermal capacity} \end{array}$$

Boundary conditions:

- ✓ bottom : $\Phi = 0$
- ✓ top: Continuity of the fluxes and the temperature between sub-surface and atmosphere

$$SW_{\text{net}} + LW_d - \underbrace{\varepsilon \sigma T_s^4 + H + L + \Phi_0}_{\text{depend on } T_s} = 0$$

$$H = \beta V C_d (q_1 - q_s(T_s))$$

$$L = \rho V C_d (T_1 - T_s)$$

Vertical discretization and time discretization of C


➤ **Tridiagonal system as for the atmosphere (different boundary conditions)**

- Heat conduction : Diffusion equation $C \frac{\partial T}{\partial t} = \frac{\partial}{\partial z} \left(\lambda \frac{\partial T}{\partial z} \right)$

$$\Phi_T = -\lambda \frac{\partial T}{\partial z} ;$$

- Top: Continuity between sub-surface and atmosphere + vertical discretization $\Phi_0 = Rad + \sum F^\downarrow(T_S^t) - \epsilon\sigma(T_S^t)^4$

$$C_{p1/2}^t \frac{T_{1/2}^t - T_{1/2}}{\delta t} = \frac{1}{z_1 - z_0} \left[\lambda_1 \frac{T_{3/2}^t - T_{1/2}^t}{z_{3/2} - z_{1/2}} \right] + Rad + \sum F^\downarrow(T_S^t) - \epsilon\sigma(T_S^t)^4$$

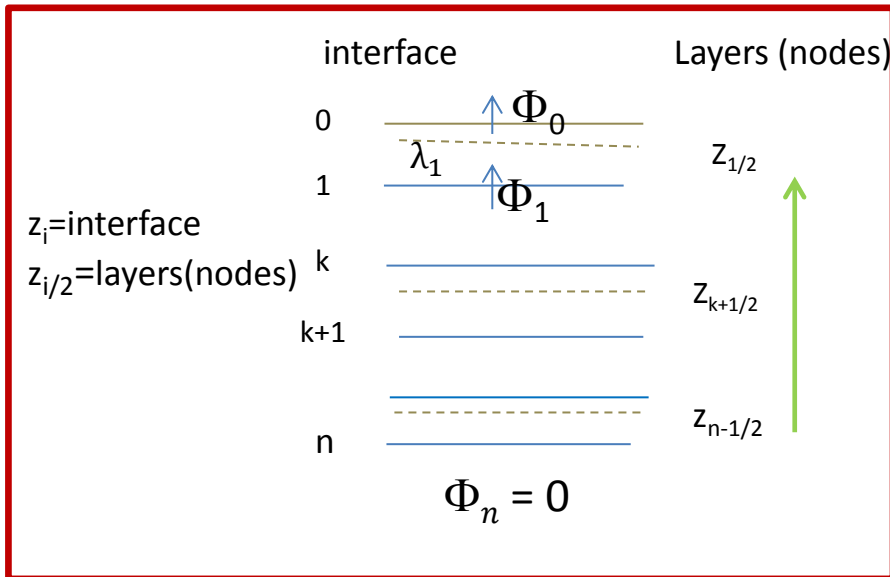

Intermediate layers

$$C_{pk+1/2}^t \frac{T_{k+1/2}^t - T_{k+1/2}}{\delta t} = \frac{1}{z_{k+1} - z_k} \left[\lambda_{k+1} \frac{T_{k+3/2}^t - T_{k+1/2}^t}{z_{k+3/2} - z_{k+1/2}} - \lambda_k \frac{T_{k+1/2}^t - T_{k-1/2}^t}{z_{k+1/2} - z_{k-1/2}} \right]$$

- Bottom : $\Phi = 0$ $C_{pn-1/2}^t \frac{T_{n-1/2}^t - T_{n-1/2}}{\delta t} = \frac{1}{z_N - z_{N-1}} \left[-\lambda_{n-1} \frac{T_{n-1/2}^t - T_{n-3/2}^t}{z_{n-1/2} - z_{n-3/2}} \right]$

- Heat conduction : Diffusion equation


$$\Phi_T = -\lambda \frac{\partial T}{\partial z} ;$$

We obtain by recurrence (same as for atmosphere)

$$\frac{\partial T}{\partial t} = -\frac{1}{c} \frac{\partial \Phi_T}{\partial z}$$

- Top: Continuity between sub-surface and atmosphere**

$$C_{p_{1/2}} \frac{T_{1/2}^t - T_{1/2}^{t-\delta t}}{\delta t} = \frac{1}{z_1 - z_0} \left[\lambda_1 \frac{T_{3/2}^t - T_{1/2}^t}{z_{3/2} - z_{1/2}} \right] + Rad + \sum F^\downarrow(T_S^t) - \varepsilon \sigma (T_S^t)^4 \quad T_{3/2}^t = \alpha_1^t T_{1/2}^t + \beta_1^t$$

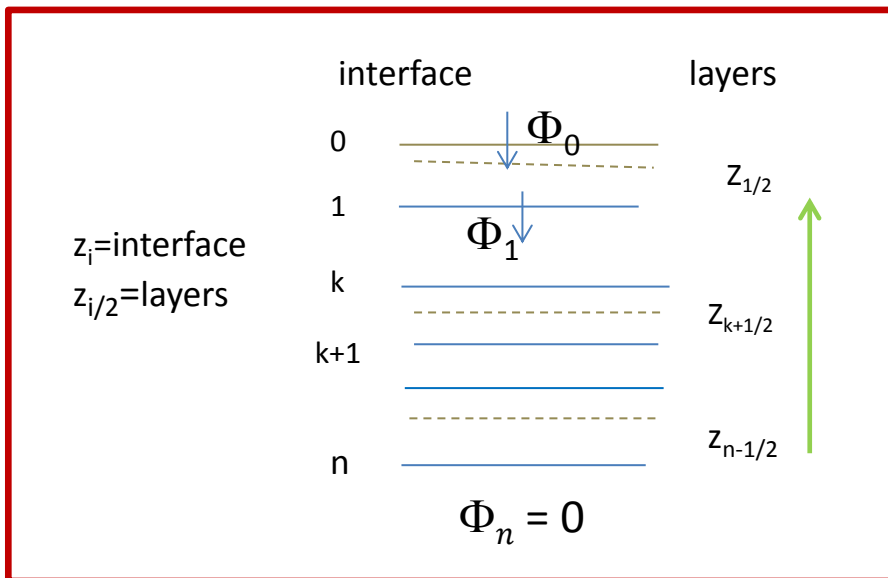

- Intermediate layers

$$T_{k+1/2}^t = \alpha_k^t T_{k-1/2}^t + \beta_k^t$$

At t , α_k and β_k depend on $T_{k1/2}$ at the previous time step they can be computed with a recurrence relation from one layer to the other.

- Bottom** : $\Phi_n = 0$

$$T_{n-1/2}^t = \alpha_{n-1}^t T_{n-3/2}^t + \beta_{n-1}^t$$

- Heat conduction : Diffusion equation

We obtain an inner relation

$$\Phi_T = -\lambda \frac{\partial T}{\partial z} ; \frac{\partial T}{\partial t} = -\frac{1}{c} \frac{\partial \Phi_T}{\partial z}$$

- Top: Continuity between sub-surface and atmosphere

$$(1) \quad C_{p_{1/2}}^t \frac{T_{1/2}^t - T_{1/2}}{\delta t} = \frac{1}{z_1 - z_0} \left[\lambda_1 \frac{T_{3/2}^t - T_{1/2}^t}{z_{3/2} - z_{1/2}} \right] + \Sigma F^\downarrow(T_S^t) - \varepsilon \sigma (T_S^t)^4$$

$$(2) \quad T_{3/2}^t = \alpha_1^t T_{1/2}^t + \beta_1^t$$

At t , α_k and β_k depend on $T_{k1/2}$ at the previous time step they can be computed with a recurrence relation from one layer to the other.

- Heat conduction : Diffusion equation

We obtain by recurrence:

$$\Phi_T = -\lambda \frac{\partial T}{\partial z} ; \frac{\partial T}{\partial t} = -\frac{1}{c} \frac{\partial \Phi_T}{\partial z}$$

- Top: Continuity between sub-surface and atmosphere

$$(1) \quad C_{p_{1/2}} \frac{T_{1/2}^t - T_{1/2}}{\delta t} = \frac{1}{z_1 - z_0} \left[\lambda \frac{T_{3/2}^t - T_{1/2}^t}{z_{3/2} - z_{1/2}} \right] + Rad + \sum F^\downarrow(T_S^t) - \varepsilon \sigma (T_S^t)^4$$

$$(2) \quad T_{3/2}^t = \alpha_1^t T_{1/2}^t + \beta_1^t$$

$$C^* \frac{T_{1/2}^t - T_{1/2}}{\delta t} = G^* + Rad + \sum F^\downarrow(T_S^t) - \varepsilon \sigma (T_S^t)^4$$

T_s : linearly extrapolated from $T_{3/2}$ and $T_{1/2}$

$$C'^* \frac{T_s^t - T_s}{\delta t} = G' * + Rad + \sum F^\downarrow(T_S^t) - \varepsilon \sigma (T_S^t)^4$$

At t , α_k and β_k depend on $T_{k1/2}$ at the previous time step they can be computed with a recurrence relation from one layer to the other.

Hourdin 1993 (thèse)

Wang, Cheruy, Dufresne 2016 GMD

$$C' * \frac{T_s^t - T_s}{\delta t} = G' * \underbrace{+Rad + \sum F^\downarrow(T_s^t) - \epsilon\sigma(T_s^t)^4}_{F_x^1}$$

$$F_x^1 = \frac{T_s^t - A_1}{B_1 \delta t}$$


Taylor development $Y^t = f'(T_s)(T_s^t - T_s)$

$$T_s^t = g(T_s)$$

t-1

t

Downhill

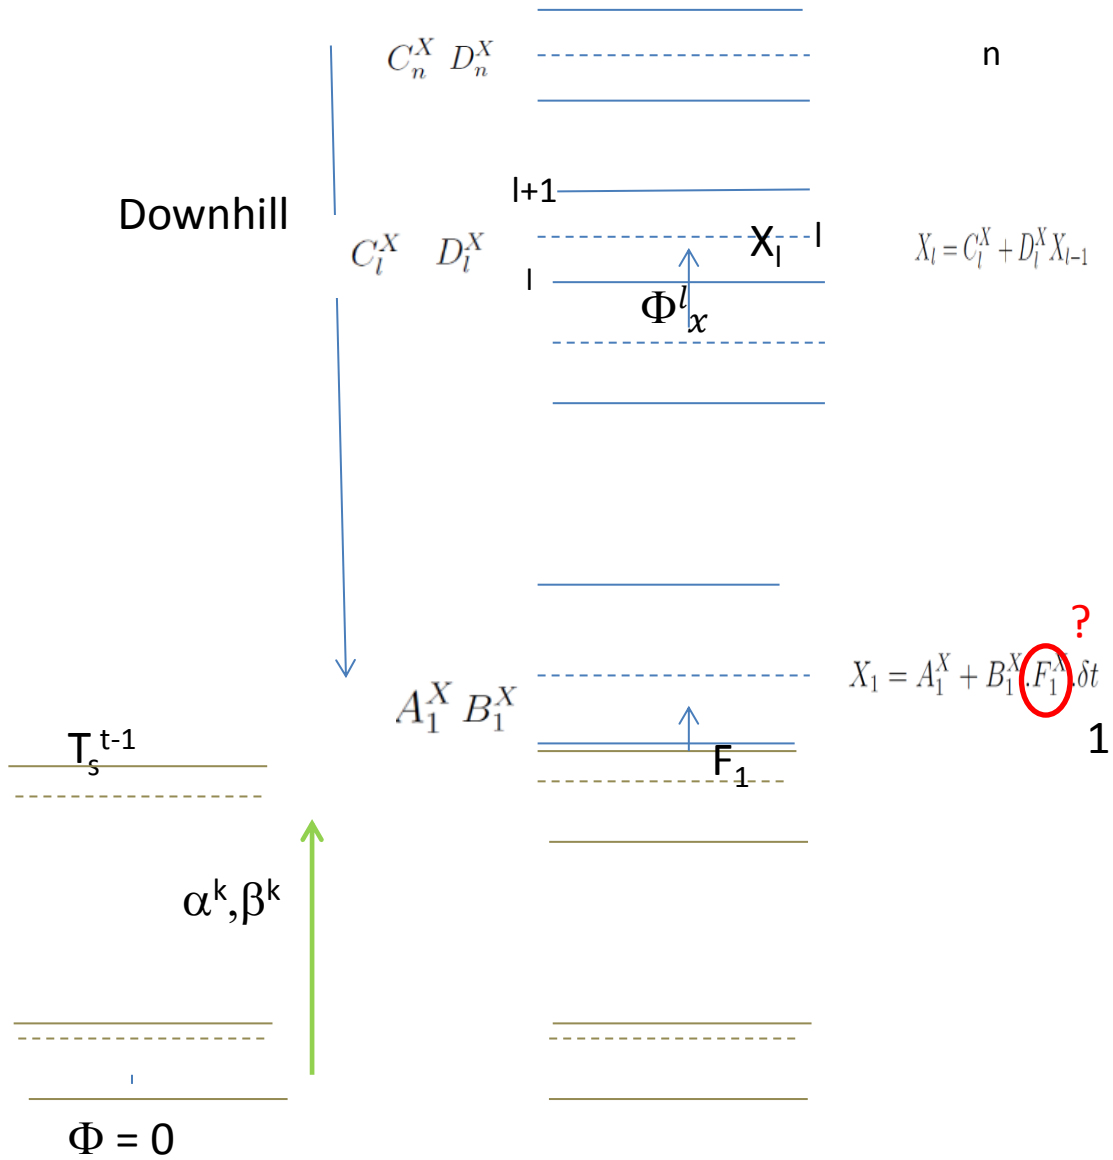




At t α_k and β_k depend on T_k at the previous time step and on the underlying layers :
They can be pre-computed

t-1

t


Down-hill

Up-hill

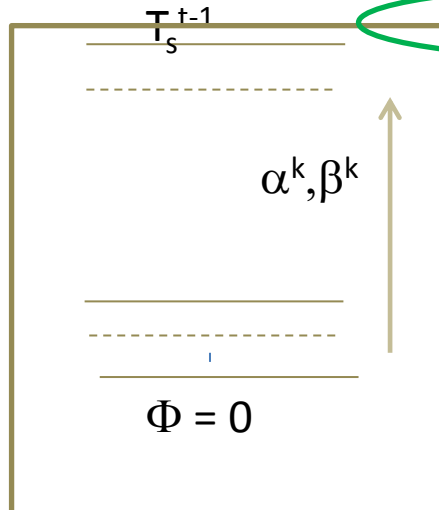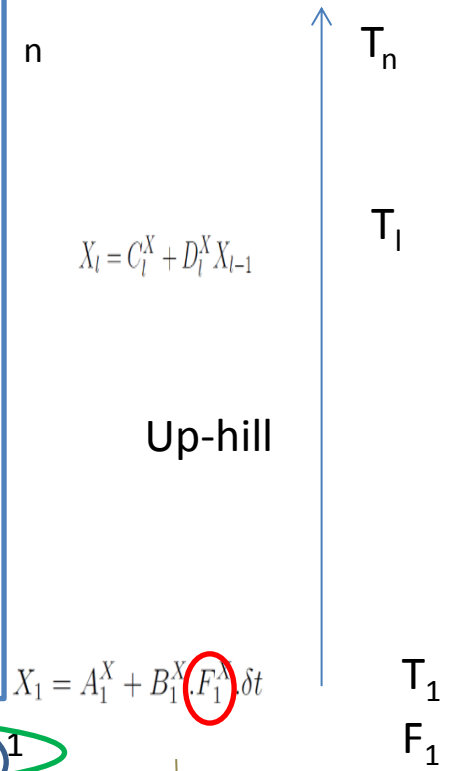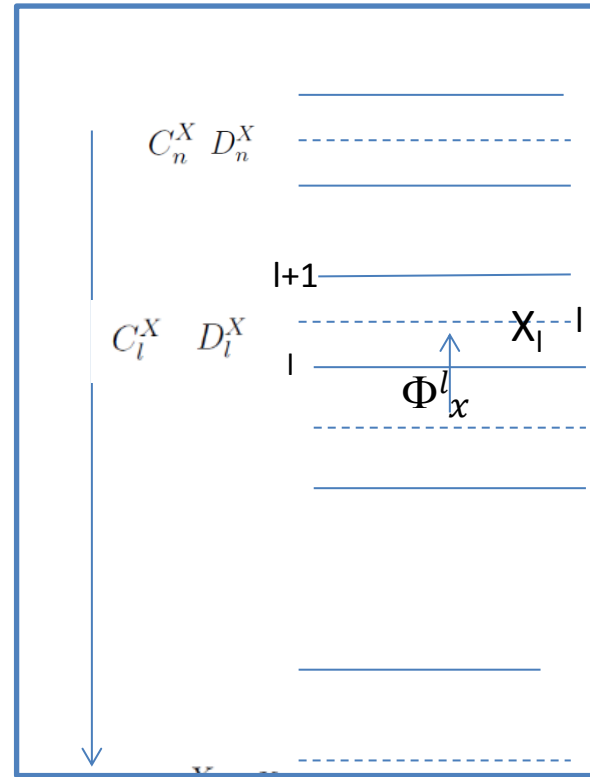

At t α_k and β_k depend on T_k at the previous time step and on the underlying layers :
They can be pre-computed

$$\Phi = 0$$

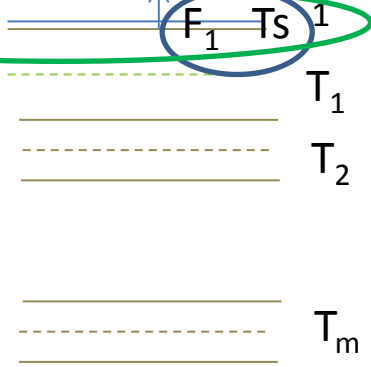

t-1

t

Down-hill



n

$$X_l = C_l^X + D_l^X X_{l-1}$$

Up-hill

$$X_1 = A_1^X + B_1^X \cdot F_1^X \delta t$$

T_n

T_l

T_1

F_1



At t α_k and β_k depend on T_k at the previous time step and on the underlying layers :
They can be pre-computed

T_1

T_2


T_m

Coupling between atmospheric column(s) and sub-surfaces

Each grid cell is divided into several sub-areas or "sub-surfaces" of fractions ω_i


Sub-surfaces

$$\sum_i \omega_i = 1$$

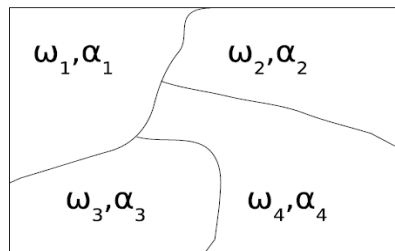


Turbulent
flux

One PBL over **each**
sub-surface

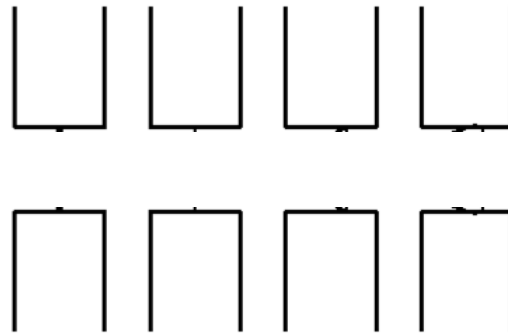

Radiative
flux

One column **covers**
all the sub-surface

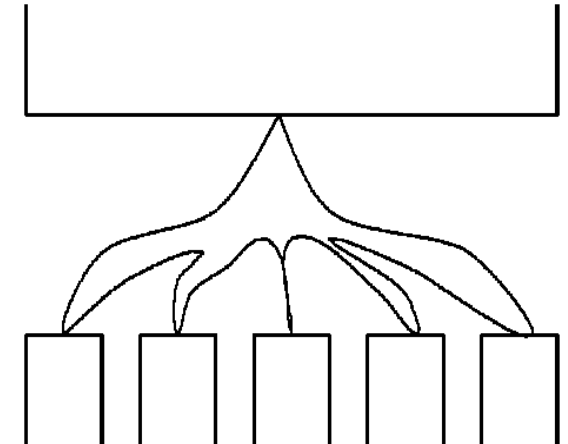

Each sub surface has to compute F_1 using variables X_p , A_1 and B_1

The boundary layer tendencies in the atmosphere are mixed between sub-columns (equivalent of averaging the surface flux)

Derivation of local sub-surface **net solar radiation** from grid average net solar radiation

The grid average net flux Ψ_s at surface has been computed for each grid point by the radiative code.

We want (1) to conserve energy and (2) to take into account the value of the local albedo α_i of the sub-surface

We compute the downward SW radiation as

with the mean albedo

$$\alpha = \sum_i \omega_i \alpha_i \quad F_{\downarrow}^s = \frac{\Psi_s}{(1 - \alpha)}$$

For each sub-surface i , the absorbed solar radiation reads:

$$\psi_i^s = (1 - \alpha_i) F_{\downarrow}^s$$

$$\psi_i^s = \frac{(1 - \alpha_i)}{(1 - \alpha)} \bar{\Psi}^s$$

One may verified that this procedure ensure energy conservation, i.e.

$$\sum_i \omega_i \psi_i^s = \Psi_s$$

Derivation of local sub-surface **net longwave radiation** from grid average net longwave radiation

The net longwave (LW) radiation $\bar{\Psi}^L$ has been computed by the radiative code for each grid cell. How to split it depending on the sub-surfaces local properties and ensuring energy conservation?

If the downward longwave flux F_{\downarrow} is uniform within each grid, the net LW flux for a sub-surface i may be written as:

$$\psi_i^L(T_i) = \epsilon_i (F_{\downarrow} - \sigma T_i^4) \quad (1)$$

where T_i is the surface temperature of sub-surface i and ϵ_i its emissivity. A linearization around the mean temperature \bar{T} gives:

$$\psi_i^L(T_i) \approx \epsilon_i (F_{\downarrow} - \sigma \bar{T}^4) - 4\epsilon_i \sigma \bar{T}^3 (T_i - \bar{T}) \quad (2)$$

To conserve the energy, the following relationship must be true:

$$\sum_i \omega_i \psi_i^L = \bar{\Psi}^L \quad (3)$$

Using Eq. 2 gives

$$\sum_i \omega_i \psi_i^L = \bar{\epsilon} (F_{\downarrow} - \sigma \bar{T}^4) - 4\sigma \bar{T}^3 \sum_i \omega_i \epsilon_i (T_i - \bar{T}) \quad (4)$$

where $\bar{\epsilon} = \sum_i \omega_i \epsilon_i$ is the mean emissivity.

Derivation of local sub-surface **net longwave radiation** from grid average net longwave radiation

$$\sum_i \omega_i \psi_i^L = \bar{\epsilon} (F_{\downarrow} - \sigma \bar{T}^4) - 4\sigma \bar{T}^3 \sum_i \omega_i \epsilon_i (T_i - \bar{T}) \quad (4)$$

where $\bar{\epsilon} = \sum_i \omega_i \epsilon_i$ is the mean emissivity. The second term on the right hand side is zero if

$$\bar{T} = \frac{\sum_i \omega_i \epsilon_i T_i}{\bar{\epsilon}} \quad (5)$$

To ensure energy conservation, we need in addition to verify:

$$\bar{\Psi}^L = \bar{\epsilon} (F_{\downarrow} - \sigma \bar{T}^4) \quad (6)$$

Which is consistent with the definition of the net LW flux at the surface. We rewrite now Eq. 2 as:

$$\psi_i^L(T_i) \approx \frac{\epsilon_i}{\bar{\epsilon}} \bar{\Psi}^L - 4\epsilon_i \sigma \bar{T}^3 (T_i - \bar{T}) \quad (7)$$

Due to radiative code limitation, in LMDZ, we always must have $\epsilon_i = 1$

Call tree

In subroutine PHYSIQ

loop over time steps

CALL `change_srf_frac` : Update fraction of the sub-surfaces (pctsrfr)

....

CALL `pbl_surface` Main subroutine for the interface with surface

Calculate net radiation at sub-surface

Loop over the sub-surfaces `nsrf`

Compress variables (Consider only one surface type and only the points for which the fraction for this sub-surface is not zero)

CALL `cdrag`: coefficients for turbulent diffusion at surface (`cdragh` and `cdragm`)

CALL `coef_diff_turb`: coef. turbulent dif. in the atmosphere (`ycoefm` et `ycoefm.`)

CALL `climb_hq_down` downhill for enthalpie H and humidity Q

CALL `climb_wind_down` downhill for wind (U and V)

CALL `surface models` for the various surface types: **`surf_land`, `surf_landice`, `surf_ocean` or `surf_seaice`**. **Each surface model computes:**

- evaporation, latent heat flux, sensible heat flux
- surface temperature, albedo (emissivity), roughness lengths

CALL `climb_hq_up` : compute new values of enthalpie H and humidity Q

CALL `climb_wind_up` : compute new values of wind (U and V)

Uncompress variables : (some variables are per unit of sub-surface fraction, some are per unit of grid surface fraction)

Cumulate in global variables after weighting by sub-surface fractions

Surface diagnostics : (T2m, Q2m, wind at 10m...)

End Loop over the sub-surfaces

Calculate the mean values over all sub-surfaces for some variables

End `pbl-surface`