

IPSLCM6 configurations

Table of Content

| | |
|---|----------|
| IPSLCM6 configurations | 1 |
| 1. IPSLCM6 model | 2 |
| 2. Resolutions and configurations | 2 |
| 2.1. IPSLCM6A-VLR_rc0 | 2 |
| 2.1.1. How to use it | 3 |
| 2.1.1.1. Specific command on TGCC Bull Curie thin nodes | 3 |
| 2.1.1.2. Specific command on IDRIS IBM Ada | 3 |
| 2.1.2. Restart files | 4 |
| 2.1.3. Output level | 4 |
| 2.1.4. Lengths, frequencies | 4 |
| 2.1.4.1. Period length | 4 |
| 2.1.4.2. Pack Frequency | 4 |
| 2.1.4.3. Rebuild frequency | 4 |
| 2.1.5. Computing centres | 4 |
| 2.1.5.1. TGCC Bull Curie thin nodes | 4 |
| 2.1.5.2. IDRIS IBM Ada | 4 |
| 2.1.6. Evaluation | 4 |
| 2.1.6.1. Results comparison between TGCC Curie and IDRIS Ada supercomputers | 5 |
| 2.1.6.2. Results comparison between IPSLCM5 and IPSLCM6 simulations | 5 |


Person in charge: Arnaud Caubel

1. IPSL-CM6 model

IPSL-CM6 is the **IPSL coupled climate model** under development for the CMIP6 simulations including atmosphere, land, ocean, sea ice and carbon cycle. This model includes :

- model components :
 - **LMDZ** as atmospheric model ;
 - **NEMO** as ocean model including sea ice (LIM2/LIM3) and marine biogeochemistry (PISCES) ;
 - **ORCHIDEE** as land model ;
- tools :
 - **OASIS3-MCT** as parallel coupler ;
 - **XIOS** as I/O library ;
 - **libIGCM** as running environment (scripts) to run the model and to perform post processing ;

This model runs on **Curie-TGCC** and **Ada-IDRIS**.

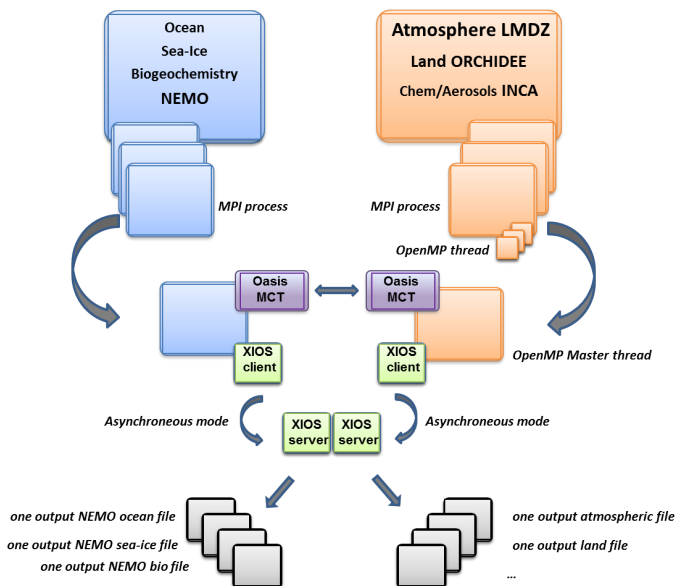

2. Resolutions and configurations

IPSL-CM6 model will be available at different resolutions/configurations :

- **IPSL-CM6A-VLR_rc0** : LMDZ(Old Physics) 96x95x39-ORCHIDEE(Choisnel) - NEMO-LIM2-PISCES ORCA2
- **IPSL-CM6-LR** (under development, not available) : LMDZ 144x144x79-ORCHIDEE - NEMO-LIM3-PISCES ORCA1xL75

2.1. IPSL-CM6A-VLR_rc0

The resolution of LMDZ is 96x95 (3,75° in longitude and 1,875° in latitude) with 39 vertical levels. The ocean configuration is ORCA2 : global ocean with a tripolar grid with one South pole, one North pole above Siberia and one North pole above northern America. The resolution is 2°. In the tropical region, the latitudinal resolution decreases to 1/2°. There are 31 vertical levels.

IPSL-CM6-VLR_rc0 is composed of following components and tools :

```
#-H- IPSL-CM6_rc0 IPSL-CM6_rc0 coupled configuration
#-H- IPSL-CM6_rc0 Working configuration started 17/04/2013
#-H- IPSL-CM6_rc0 with 5 NEMO sub-domains
#-H- IPSL-CM6_rc0 NEMOGCM trunk revision 4859
```

```

#-H- IPSLCM6_rc0 XIOS branch xios-1.0 revision 592
#-H- IPSLCM6_rc0 IOIPSL/src svn tags/v2_2_2
#-H- IPSLCM6_rc0 LMDZ5 LMDZ6_rc0 branch revision 2283
#-H- IPSLCM6_rc0 ORCHIDEE version trunk rev 2247
#-H- IPSLCM6_rc0 OASIS3-MCT 2.0_branch rev 1129
#-H- IPSLCM6_rc0 IPSLCM6 v6_rc0 svn
#-H- IPSLCM6_rc0 libIGCM trunk 1174
#-M- IPSLCM6_rc0 arnaud.caubel@lsce.ipsl.fr
#-C- IPSLCM6_rc0 IOIPSL/tags/v2_2_2/src HEAD 8 IOIPSL/src modeles
#-C- IPSLCM6_rc0 trunk/ORCHIDEE 2247 14 ORCHIDEE modeles
#-C- IPSLCM6_rc0 branches/OASIS3-MCT_2.0_branch/oasis3-mct 1129 15 oasis3-mct .
#-C- IPSLCM6_rc0 LMDZ5/branches/LMDZ6_rc0 2283 11 LMDZ modeles
#-C- IPSLCM6_rc0 CONFIG/UNIFORM/v6_rc0/IPSLCM6 HEAD 8 IPSLCM6 config
#-C- IPSLCM6_rc0 trunk/libIGCM 1174 10 libIGCM .
#-C- IPSLCM6_rc0 trunk/NEMOGCM 4859 7 . modeles
#-C- IPSLCM6_rc0 XIOS/branchs/xios-1.0 592 12 XIOS modeles

```

2.1.1. How to use it

Here are the commands you need to know if you want to retrieve and compile the IPSLCM6 model and if you want to setup and run a piControl experiment (only piControl experiment is available):

```

mkdir MONREPERTOIRE ; cd MONREPERTOIRE
svn_an0 # svn co http://forge.ipsl.jussieu.fr/igcmg/svn/modipsl/trunk modipsl
cd modipsl/util
./model IPSLCM6_rc0
cd ../config/IPSLCM6
gmake # by default ORCA2xLMD9695-L39
cp EXPERIMENTS/IPSLCM5/EXP00/config.card .
vi config.card # modify JobName (at least) : MYJOBNAME, restarts
../util/ins_job # Check and complete job's header
cd MYJOBNAME
vi Job_MYJOBNAME # modify PeriodNb, adjust the time, headers ...
llsubmit Job_MYJOBNAME # IDRIS
ccc_msub Job_MYJOBNAME # TGCC

```

2.1.1.1. Specific command on TGCC Bull Curie thin nodes

The basic configuration (default configuration) uses **160 computing cores** or 10 nodes: 1 process for XIOS, 31 processes for NEMO, and 32 MPI processes and 4 OpenMP thread for LMDZ. You have to modify header of the Job script as follow :

```

#MSUB -n 160 # number of cores used by the Job (equal to the total number of process/threads : for example 32x4 + 31 + 1 =
#MSUB -x # Sprecify the node is not shared
#MSUB -E '--cpu_bind=none'

```

2.1.1.2. Specific command on IDRIS IBM Ada

The basic configuration uses **56 computing cores** or 2 nodes: 1 for XIOS, 7 for NEMO, and 24 MPI and 2 OpenMP for LMDZ. You have to modify headers of the Job script as follows :

```

# Nombre de processus MPI demandes (ici 24 + 7 + 1 = 32)
# @ total_tasks = 32
# Nombre de coeurs réellement utilisés (ici 24 x 2 + 7 + 1 = 56)
# @ environment = "BATCH_NUM_PROC_TOT=56"
# Nombre de taches OpenMP/pthreads par processus MPI
# @ parallel_threads = 2

```

and config.card as follows :

```

#=====
#D-- Executable -
[Executable]
#D- For each component, Real name of executable, Name of executable for oasis
ATM= (gcm.e, lmdz.x, 24MPI, 2OMP)
SRF= ( " " , " " )
SBG= ( " " , " " )
OCE= (opa, opa.xx , 7MPI)
ICE= ( " " , " " )
MBG= ( " " , " " )
CPL= ( " " , " " )
IOS= (xios_server.exe, xios.x, 1MPI)

```

On Ada, it is needed to use adjust option for LMDZ(beware of OpenMP case, more information [here](#)).

2.1.2. Restart files

IPSLCM6 configuration could restart from any IPSLCM5A, IPSLCM5_v5 and IPSLCM6 restart files. Default configuration starts from IPSLCM5A piControl2pm01 simulation (2349-12-31).

2.1.3. Output level

By default, only **monthly outputs** and **low output levels** are activated.

2.1.4. Lengths, frequencies

2.1.4.1. Period length

Default period length is 1Y, i.e in config.card :

```
PeriodLength=1Y
```

Note that clean_month.job will remove last period files, i.e last simulated year files.

2.1.4.2. Pack Frequency

Default pack frequency is 10Y, i.e in config.card :

```
PackFrequency=10Y
```

Note that since clean_year.job works on the latest pack period, clean_year.job will remove files from latest 10Y pack period. clean_year.job can also be used several time in a row to delete several 10Y pack periods.

2.1.4.3. Rebuild frequency

Since we run with XIOS (server mode) as output library, **the rebuild step is not needed anymore**.

2.1.5. Computing centres

2.1.5.1. TGCC Bull Curie thin nodes

Default configuration on **160 cores** allows you to run **38 simulated years per day**. Because of load-balancing (difference between ocean computing time and atmosphere computing time), not all configurations (in terms of number of process/threads) are efficient. If you want to run a configuration with less cores, ask Arnaud Caubel what would be the optimum configuration. The configuration is regularly used and evaluated on this machine:

■ <http://webservices.ipsl.jussieu.fr/trusting/>

2.1.5.2. IDRIS IBM Ada

Configuration on **56 cores** allows you to run **16 simulated years per day**. This configuration is regularly used and evaluated on this machine:

■ <http://webservices.ipsl.jussieu.fr/trusting/>

2.1.6. Evaluation

Person in charge: Jérôme Servonnat

2.1.6.1. Results comparison between TGCC Curie and IDRIS Ada supercomputers

Simulations with default configuration have been performed both on Curie and Ada :

- CTLCM6G on Curie : <http://dods.extra.cea.fr/work/p86caub/IPSLCM6/PROD/piControl/CTLCM6G/MONITORING>
- CM6VLR1 on Ada : <http://dodsp.idris.fr/rces061/IPSLCM6/PROD/piControl/CM6VLR1/MONITORING>

Inter-monitoring comparison : http://dods.extra.cea.fr/work/p86caub/INTERMONITORING/intermonit_comp_ada_curie_rc0

2.1.6.2. Results comparison between IPSL5 and IPSL6 simulations

Here are simulations performed to validate IPSL6-VLR_rc0 configuration :

CTLCM6G (default configuration IPSL6-VLR_rc0) : IPSL6-VLR_rc0 model (CM6 water routing scheme, pmagic=-0.01, start from 2349-12-31 piControl2pm01)

- Output and Analyse files : /ccc/store/cont003/dsm/p86caub/IGCM_OUT/IPSLCM6/PROD/piControl/CTLCM6G
- CTLCM6F : IPSL6-VLR_rc0 model(CM5 water routing scheme, start from 2499-12-31 piControl2)
- Output and Analyse files : /ccc/store/cont003/dsm/p86caub/IGCM_OUT/IPSLCM6/PROD/piControl/CTLCM6F
- CTLCM6H : IPSL6-VLR_rc0 model (CM6 water routing scheme, pmagic=-0.01, without NEMO TKE IPSL5 parameters, start from 3199-12-31 CTLCM6G)
- Output and Analyse files : /ccc/store/cont003/dsm/p86caub/IGCM_OUT/IPSLCM6/PROD/piControl/CTLCM6H

These simulations have been compared with IPSL5 simulations results :

- piControl2 : IPSL5A reference simulation
- CTLCM5V5v5 : IPSL5_v5 configuration(aerosols v5)
- piControl2pm01 : IPSL5A reference simulation with pmagic=-0.01.

Following validation aspects are available :

- Inter-monitoring comparison : http://dods.extra.cea.fr/work/p86caub/INTERMONITORING/intermonit_valid_CM6A_VLR_rc0
- Metric table

| variable | rms_xyt_ann_GLB | | | | | | | | | | | | | | | Mean | | |
|-----------------|-----------------|------------------|------------|---------|------------|---------|------------|---------|------------|---------|------------|----------|------------|----------|------------|---------|--------|--------|
| | pr | prw | psi | rlut | rlutcs | rsut | rsutcs | tas | uas | | | vas | | | | | | |
| referenceType | alternate1 | default | alternate1 | default | alternate1 | default | alternate1 | default | alternate1 | default | alternate1 | default | alternate1 | default | alternate1 | default | | |
| referenceName | TRMM | GPCP | RSS | ERA40 | ERAINT | CERES | CERES | CERES | ERA40 | ERAINT | ERA40 | ERAINT | ERA40 | ERAINT | ERA40 | ERAINT | | |
| simulationModel | simulationName | simulationPeriod | | | | | | | | | | | | | | | | |
| IPSLCMSA | CTLCM5V5v5 | 2510_2519 | -0.956 | -0.854 | +0.443 | -4.134 | -4.256 | +0.461 | +0.492 | -1.009 | -0.930 | -3.155 | -3.184 | -0.575 | -0.508 | +0.189 | +0.425 | -1.947 |
| | | 2520_2529 | -0.956 | -0.854 | +0.279 | +1.184 | +1.215 | -1.004 | -0.154 | -0.880 | -0.785 | -3.470 | -3.493 | +1.251 | +0.972 | -0.284 | -0.284 | -0.484 |
| | 2000_2009 | -0.259 | +0.569 | +3.722 | -2.907 | -4.159 | +5.148 | +10.484 | -2.161 | +3.970 | -19.927 | -20.027 | -2.730 | -3.248 | +0.900 | +1.134 | -1.972 | |
| | piControl2pm01 | 2010_2019 | +0.229 | +1.992 | +3.149 | +0.681 | +0.536 | +4.135 | +9.409 | -2.161 | +1.920 | -17.466 | -18.505 | +1.251 | +1.512 | -0.047 | +0.189 | -0.892 |
| | | 2020_2029 | +0.040 | +1.044 | +3.395 | -2.233 | -2.498 | +3.812 | +9.782 | -2.162 | +1.995 | -17.981 | -18.811 | -1.993 | -2.248 | +0.463 | +0.462 | -1.755 |
| | IPSLCM6 | CTLCM6G | 2030_2039 | +0.838 | +0.818 | -0.049 | -4.695 | -4.359 | -0.378 | -2.152 | -1.520 | -0.295 | -0.431 | -0.429 | -2.730 | -2.808 | +0.900 | +1.134 |
| 2710_2719 | | | -0.259 | +1.044 | -0.787 | -2.056 | -3.492 | -0.882 | -2.229 | -1.283 | -0.230 | +1.493 | +2.022 | -2.730 | -2.808 | +0.900 | +1.134 | -0.948 |
| 3000_3009 | | +0.229 | +0.467 | -0.705 | +2.093 | +2.115 | -0.020 | -0.769 | -0.229 | -1.905 | +2.439 | +2.961 | +0.271 | +0.032 | +0.189 | +0.189 | +1.442 | |
| piControl2 | | 3210_3219 | +0.259 | +0.467 | -0.295 | -1.425 | -1.786 | -0.882 | -0.413 | -1.221 | -0.805 | +0.431 | +0.797 | +1.251 | +0.432 | +0.900 | +0.898 | -0.209 |
| | | 3220_3229 | +1.735 | +0.312 | -0.131 | +0.742 | +0.419 | +1.551 | -0.384 | -0.410 | -0.805 | +1.002 | +1.039 | +0.527 | +3.132 | +0.426 | +0.425 | +1.091 |
| IPSLCM5A | | CTLCM6G | 2020_2029 | +2.035 | +6.736 | +3.333 | +1.073 | +1.148 | +7.125 | +10.217 | -0.322 | -0.955 | -106.024 | -127.278 | +0.402 | +0.292 | +1.137 | +1.134 |
| | 2710_2719 | | +0.838 | +3.890 | +1.673 | +3.933 | +3.856 | +3.428 | +6.226 | -0.887 | -0.780 | -102.618 | -113.297 | +0.215 | +0.531 | +0.189 | +0.189 | +0.594 |
| | 3000_3009 | +1.137 | +4.839 | +2.165 | +0.727 | +0.611 | +4.896 | +7.994 | -0.413 | -0.105 | -130.880 | -141.522 | +0.223 | +4.750 | +0.426 | +0.425 | -0.058 | |
| | piControl2 | 3200_3209 | +2.932 | +6.159 | +2.047 | -1.097 | -1.270 | +0.047 | +0.278 | -0.063 | +0.485 | -105.719 | -116.667 | +0.908 | +2.052 | +1.611 | +1.607 | +0.209 |
| | | 3210_3219 | +2.234 | +5.221 | +2.411 | +1.002 | +1.276 | +4.846 | +6.486 | -0.229 | +1.095 | -106.088 | -116.972 | +0.223 | +4.750 | +0.663 | +0.662 | +0.292 |
| | IPSLCM5A | CTLCM6H | 2010_2019 | +2.234 | +6.736 | +1.672 | -1.824 | -1.913 | +0.148 | +0.767 | -0.820 | +1.095 | -105.142 | -115.443 | +1.820 | +0.972 | +1.137 | +1.134 |
| 2020_2029 | | | +1.735 | +6.882 | +2.328 | +0.022 | +0.107 | +6.669 | +10.761 | -0.222 | +0.895 | -104.186 | -115.188 | +1.490 | +0.490 | +0.189 | +0.189 | +0.071 |
| 2700_2709 | | +0.658 | +0.599 | +0.033 | -0.799 | -0.804 | +0.988 | +1.233 | +0.145 | +1.203 | -0.431 | -0.429 | -1.993 | -1.728 | -0.047 | -0.047 | -1.225 | |
| piControl2 | | 2710_2719 | +1.137 | +0.599 | -0.049 | +0.148 | +0.269 | -0.274 | -0.464 | +0.487 | -0.030 | +0.431 | +0.490 | +0.134 | +0.432 | -0.047 | -0.047 | +0.189 |
| | | 2720_2729 | +0.229 | +1.992 | +3.161 | +4.641 | +4.656 | +0.385 | +0.400 | +0.460 | -0.280 | -1.493 | -2.067 | +0.402 | +0.032 | +0.501 | +0.501 | +1.072 |
| piControl2 | | 2730_2739 | -1.257 | -2.277 | -0.049 | -0.440 | -0.460 | -0.426 | +0.139 | -0.495 | -0.495 | +0.010 | +0.490 | +0.493 | +0.432 | +0.189 | +0.189 | -1.198 |
| | 2740_2749 | +0.539 | -0.064 | -0.199 | -0.395 | -0.411 | -0.274 | -0.802 | -0.190 | +1.280 | +1.077 | +1.754 | -0.090 | +4.988 | +0.426 | +0.425 | -0.949 | |

Root-Mean-Square Error calculated on the seasonal cycle over the globe (land + ocean) against two different references for each variable. This metric synthesizes the bias (difference in mean), the spatio-temporal correlation and standard-deviation ratio. The results are presented in % of the mean RMSE of piControl2 => a result of -10% indicates that the RMSE is 10% lower than the average RMSE of the reference simulation (here, five seasonal cycles of piControl2) ; the blue color shows the RMSE that are lower (in better agreement with the reference dataset) than the reference simulation. Inversely, the red color indicates a degradation compared with the reference simulation. For each simulation, the RMSE are shown for several seasonal cycles to illustrate the interannual/decadal variability of the results. For further illustration of the differences between IPSL-CM5A-LR and CM6A-VLR_rc0 with new water routing scheme and p_magic = -0.01, please refer to the following atlases:

- IPSL-CM5A-LR: http://dods.extra.cea.fr/work/p86caub/IPSLCM5A/DEV/piControl/CTLCM5V5v5/ATLAS/SE_2500_2539/ATM/ATM.html
- IPSL-CM6A-VLR_rc0: http://dods.extra.cea.fr/work/p86caub/IPSLCM6/PROD/piControl/CTLCM6G/ATLAS/SE_3250_3299/ATM/ATM.html

The table shows that :

- CTLCM5V5v5 has similar results as piControl2 (less than 5%) ; this suggests that CM6A-VLR_rc0 (with same water routing scheme and same p_magic as CM5A-LR) simulates a climate that is very similar to IPSL-CM5A-LR
- Same for CTLCM6F
- CTLCM6G and CTLCM6H (IPSLCM6A-VLR_rc0 with new water routing scheme and p_magic = -0.01) and piControl2pm01 (p_magic = -0.01) show a reduction of the error on the 2m-temperature (tas) of around 15%, very likely associated with the adjustment of albedo (p_magic = -0.01)
- For those simulations, we also note a degradation of the LW up (rlut and rlutcs) between 5 and 10% (greater than the variability among the seasonal cycles of piControl2); this is confirmed by the bias maps of CTLCM6G (http://dods.extra.cea.fr/work/p86caub/IPSLCM6/PROD/piControl/CTLCM6G/ATLAS/SE_3250_3299/ATM/lw_116852/lw.pdf) compared with CTLCM5V5v5 (http://dods.extra.cea.fr/work/p86caub/IPSLCM5A/DEVT/piControl/CTLCM5V5v5/ATLAS/SE_2500_2539/ATM/lw_26556/lw.pdf) ; this change mainly concerns the tropics; in the same time, the metric table shows that the SW gets significantly better (around 5%)
- For CTLCM6G and CTLCM6H, we also see a slight degradation of the zonal wind at 10m (uas), of the same order as the LW ; looking at the RMSE tables for the different seasons and regions, we can see that this degradation mainly concerns the tropics (-20/20°N) and the extra-tropical southern hemisphere. On the bias maps (compare http://dods.extra.cea.fr/work/p86caub/IPSLCM5A/DEVT/piControl/CTLCM5V5v5/ATLAS/SE_2500_2539/ATM/vitu_44109/vitu.gif with http://dods.extra.cea.fr/work/p86caub/IPSLCM6/PROD/piControl/CTLCM6G/ATLAS/SE_3250_3299/ATM/vitu_60643/vitu.gif) we see that the zonal wind biases are the same but slightly reinforced in CTLCM6G.
- For the other variables, the results do not show significant differences between piControl2 and IPSLCM6A-VLR_rc0 (with the new water routing scheme and p_magic = -0.01, simulations CTLCM6G and CTLCM6H)

Conclusion of the metric table:

- the evaluation metrics of the seasonal cycle of IPSLCM6A-VLR_rc0 with the water routing scheme of CM5A and the same p_magic are similar to the ones obtained for piControl2. This suggests that the model is the same.
- the new water routing scheme and the tuned p_magic produce a climate that is in better agreement for IPSLCM6A-CLR_rc0 compared with IPSLCM5A-LR for tas and the SW; we note a degradation of the LW and the zonal winds (stronger biases, rather than a degradation of the spatial structure) ; with the new water routing scheme and p_magic = -0.01, we can say that IPSLCM6A-VLR_rc0 is not the same as CM5A-LR.