

Wikiprint Book

Title: 1. IPSLCM6 model

Subject: Igcmg_doc - Doc/Config/IPSLCM6_rc1

Version: 16

Date: 06/26/24 18:19:32

Table of Content

IPSLCM6_LR - (IPSLCM6_rc1) configuration	3
1. IPSLCM6 model	3
2. Resolutions and configurations	3
2.1. IPSLCM6-LR_rc1	3
2.1.1. How to use it	4
2.1.2. Restart files	4
2.1.3. Output level	4
2.1.4. Lengths, frequencies	4
2.1.4.1. Period length	4
2.1.4.2. Pack Frequency	4
2.1.4.3. Rebuild frequency	4
2.1.4.4. How to add a parameter in NEMO's namelist?	5
2.1.4.5. What is the maximum length for a simulation name?	5
2.1.5. Computing centres	5
2.1.5.1. TGCC Bull Curie thin nodes (not anymore in service)	5


IPSLCM6_LR - (IPSLCM6_rc1) configuration

Person in charge: Olivier Marti

1. IPSLCM6 model

You can find [here](#) a description for IPSLCM6 model

The version rc1 (IPSLCM6_rc1) runs on **Curie-TGCC thin nodes**.

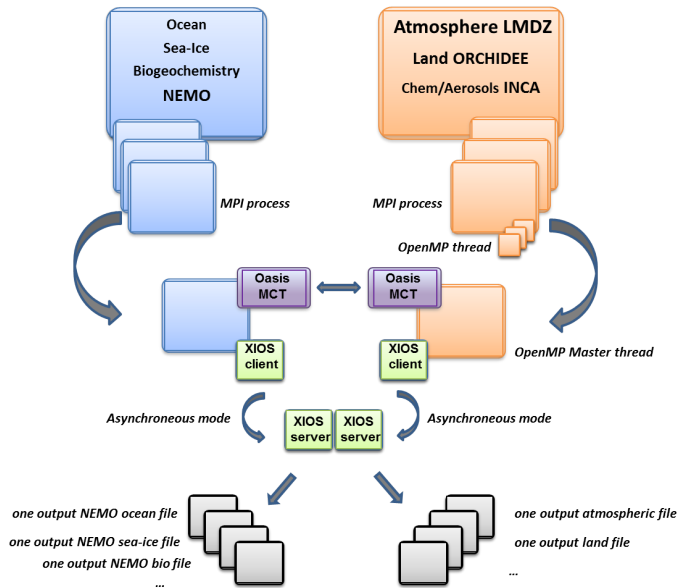

2. Resolutions and configurations

IPSLCM6 model will be available at different resolutions/configurations :

- **IPSLCM6A-VLR_rc0** : LMDZ(Old Physics) 96x95x39-ORCHIDEE (Choisnel) - NEMO-LIM2-PISCES ORCA2. You can find [here](#) informations for the VLR (IPSLCM6_rc0) configuration.
- **IPSLCM6-LR** (under development, **not available**) : LMDZ 144x144x79-ORCHIDEE (CWRR) - NEMO-LIM3-PISCES eORCA1xL75

2.1. IPSLCM6-LR_rc1

The resolution of LMDZ is 144x142 (2.5° in longitude and 1.5° in latitude) with 79 vertical levels. The ocean configuration is eORCA1L75 : global ocean with a tripolar grid with one South pole, one North pole above Siberia and one North pole above northern America. The resolution is 1°. In the tropical region, the latitudinal resolution decreases to 1/2°. There are 76 vertical levels, with 1m resolution near the surface, and 200m in the abyss.

For LMDZ, the new physics is used. Current test (Sept. 2015) is NP 5.17h.

IPSLCM6-LR_rc1 is composed of following components and tools (Sept. 2015) :

```
#-H- IPSLCM6_rc1 IPSLCM6_rc1 coupled configuration
#-H- IPSLCM6_rc1 Working configuration started 27/03/2015
#-H- IPSLCM6_rc1 NEMOGCM branches/v3_6_STABLE/NEMOGCM revision 5618
#-H- IPSLCM6_rc1 XIOS branch xios-1.0 revision 592
#-H- IPSLCM6_rc1 IOIPSL/src svn tags/v2_2_2
#-H- IPSLCM6_rc1 LMDZ5 trunk revision 2327
#-H- IPSLCM6_rc1 ORCHIDEE version trunk rev 2724
#-H- IPSLCM6_rc1 OASIS3-MCT 2.0_branch rev 1129
#-H- IPSLCM6_rc1 IPSLCM6 svn
```

```

#-H- IPSLCM6_rc1 libIGCM trunk 1174
#-M- IPSLCM6_rc1 arnaud.caubel@lsce.ipsl.fr
#-C- IPSLCM6_rc1 IOIPSL/tags/v2_2_2/src HEAD 8 IOIPSL/src modeles
#-C- IPSLCM6_rc1 trunk/ORCHIDEE 2848 14 ORCHIDEE modeles
#-C- IPSLCM6_rc1 branches/OASIS3-MCT_2.0_branch/oasis3-mct 1129 15 oasis3-mct .
#-C- IPSLCM6_rc1 LMDZ5/trunk 2327 11 LMDZ modeles
#-C- IPSLCM6_rc1 CONFIG/UNIFORM/v6/IPSLCM6 HEAD 8 IPSLCM6 config
#-C- IPSLCM6_rc1 trunk/libIGCM 1174 10 libIGCM .
#-C- IPSLCM6_rc1 branches/2015/nemo_v3_6_STABLE/NEMOGCM 5618 7 . modeles
#-C- IPSLCM6_rc1 trunk/ORCA1_LIM3_PISCES HEAD 17 . modeles/NEMOGCM/CONFIG
#-C- IPSLCM6_rc1 XIOS/branchs/xios-1.0 604 12 XIOS modeles

```

Caution : this is subject to quick changes !

2.1.1. How to use it

Here are the commands you need to know if you want to retrieve and compile the IPSLCM6 model and if you want to setup and run a piControl experiment (only piControl experiment is available):

```

mkdir YOUR_DIRECTORY ; cd YOUR_DIRECTORY
svn_an0 # svn co http://forge.ipsl.fr/igcmg/svn/modipsl/trunk modipsl
cd modipsl/util
./model IPSLCM6_rc1
cd ../config/IPSLCM6
gmake IPSLCM6-LR
cp EXPERIMENTS/IPSLCM6/EXP00/config.card .
vi config.card # modify JobName (at least) : MYJOBNAME, restarts
../util/ins_job # Check and complete job's header
# ../util/ins_job -m Intel # on ada after a compilation with Intel 2016.2
cd MYJOBNAME
vi Job_MYJOBNAME # modify PeriodNb, adjust the time, headers ...
llsubmit Job_MYJOBNAME # IDRIS
ccc_msub Job_MYJOBNAME # TGCC

```

2.1.2. Restart files

Not available yet. Waiting for reference simulations.

2.1.3. Output level

By default, only **monthly outputs** and **low output levels** are activated.

2.1.4. Lengths, frequencies

2.1.4.1. Period length

Default period length is 1Y, i.e in config.card :

```
PeriodLength=1Y
```

Note that clean_PeriodLength.job will remove last period files, i.e last simulated year files.

2.1.4.2. Pack Frequency

Default pack frequency is 1Y, i.e in config.card :

```
PackFrequency=1Y
```

2.1.4.3. Rebuild frequency

Since we run with XIOS (server mode) as output library, **the rebuild step is not needed anymore.**

2.1.4.4. How to add a parameter in NEMO's namelist?

- let find the parameter in namelist_ref. For example in modeles/NEMOGCM/CONFIG/SHARED/namelist_ice_lim3_ref
- let find the namelist's name : for example &namicedyn
- let add a line with the new of the parameter in the file PARAM/namelist_lim3_ORCA1_cfg in the &namicedyn section

2.1.4.5. What is the maximum length for a simulation name?

Due to limitation in NEMO, a simulation should have **less than 39 characters**.

2.1.5. Computing centres

2.1.5.1. TGCC Bull Curie thin nodes (not anymore in service)

Default configuration on **598 cores** allows you to run **3 simulated years per day**. Because of load-balancing (difference between ocean computing time and atmosphere computing time), not all configurations (in terms of number of process/threads) are efficient. If you want to run a configuration with less cores, ask Arnaud Caubel what would be the optimum configuration.